


Aro acero interior IRT1225-2-IKO

IRT1225-2-IKO



| Shaft<br>dia.<br>mm | Identification number | Mass<br>(Ref.)<br>g | Boundary dimensions<br>mm |    |      |                   |                             | Bearing mounting<br>dimension mm | Assembled bearings |                   |           |
|---------------------|-----------------------|---------------------|---------------------------|----|------|-------------------|-----------------------------|----------------------------------|--------------------|-------------------|-----------|
|                     |                       |                     | d                         | F  | B    | r <sub>s</sub> mm | d <sub>2</sub><br>Min. Max. |                                  | TA...Z<br>(TAM)    | TLA...Z<br>(TLAM) | YT<br>YTL |
| 12                  | IRT 1225-2            | 22.5                | 12                        | 17 | 25.5 | 0.3               | 14 16                       |                                  | TA 1725Z           | —                 | YT 1725   |

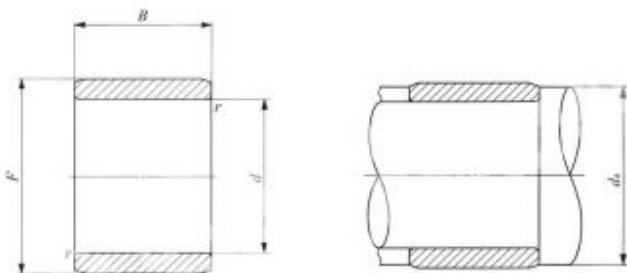

**Aro acero interior IRT1225-2-IKO**

| Caractéristique            | Valeur |
|----------------------------|--------|
| d - Diámetro interior (mm) | 12     |
| D - Diámetro exterior (mm) | 17     |
| C - Espesor (mm)           | 25,5   |
| Marca                      | IKO    |
| Unidad de venta            | pieza  |

