


Aro acero interior IRT1525-IKO

IRT1525-IKO



| Shaft<br>dia.<br>mm | Identification number | Mass<br>(Ref.)<br>g | Boundary dimensions<br>mm |    |      |                     |                             | Bore/mounting<br>dimension mm | Assembled bearings |                   |           |
|---------------------|-----------------------|---------------------|---------------------------|----|------|---------------------|-----------------------------|-------------------------------|--------------------|-------------------|-----------|
|                     |                       |                     | d                         | F  | B    | r <sub>s, max</sub> | d <sub>2</sub><br>Min. Max. |                               | TA...Z<br>(TAM)    | TLA...Z<br>(TLAM) | YT<br>YTL |
| 15                  | IRT 1525              | 15.2                | 15                        | 18 | 25.5 | 0.3                 | 17 17.5                     | TA 1825Z                      | —                  | —                 | —         |

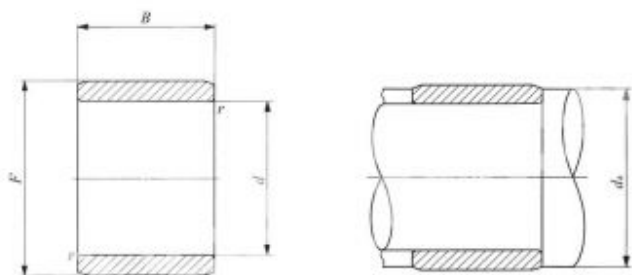

**Aro acero interior IRT1525-IKO**

| Caractéristique            | Valeur |
|----------------------------|--------|
| d - Diámetro interior (mm) | 15     |
| D - Diámetro exterior (mm) | 18     |
| C - Espesor (mm)           | 25,5   |
| Marca                      | IKO    |
| Unidad de venta            | pieza  |

