


Aro acero interior IRT2530-IKO

IRT2530-IKO



Shaft dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm					Bore mounting Shoulder mm		Assembled bearings		
			d	F	B	r _{s min}	d _s		TA...Z (TAM)	TLA...Z (TLAM)	YT YTL	
							Min.	Max.				
25	IRT 2530	40	25	29	30.5	0.3	27	28	TA 2930Z	—	—	

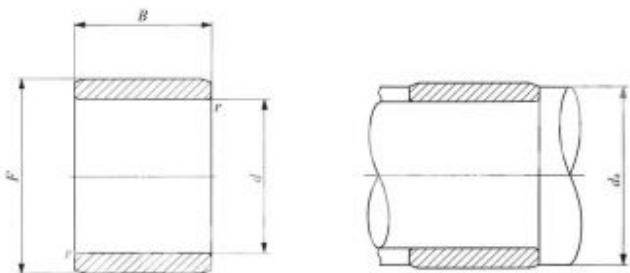

Aro acero interior IRT2530-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	25
D - Diámetro exterior (mm)	29
C - Espesor (mm)	30,5
Marca	IKO
Unidad de venta	pieza

