


Aro acero interior IRT2820-IKO

IRT2820-IKO



| Shaft<br>dia.<br>mm | Identification number | Mass<br>(Ref.)<br>g | Boundary dimensions<br>mm |    |      |                    |                | Shoulder mounting<br>Shoulder mm |                 | Assembled bearings |           |  |
|---------------------|-----------------------|---------------------|---------------------------|----|------|--------------------|----------------|----------------------------------|-----------------|--------------------|-----------|--|
|                     |                       |                     | d                         | F  | B    | r <sub>s min</sub> | d <sub>s</sub> |                                  | TA...Z<br>(TAM) | TLA...Z<br>(TLAM)  | YT<br>YTL |  |
|                     |                       |                     |                           |    |      |                    | Min.           | Max.                             |                 |                    |           |  |
| 28                  | IRT 2820              | 29.5                | 28                        | 32 | 20.5 | 0.3                | 30             | 31                               | TA 3220Z        | —                  | YT 3220   |  |

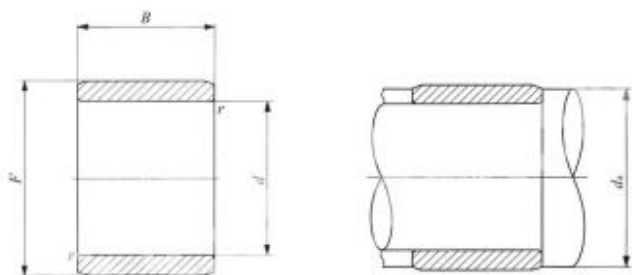

**Aro acero interior IRT2820-IKO**

| Caractéristique            | Valeur |
|----------------------------|--------|
| d - Diámetro interior (mm) | 28     |
| D - Diámetro exterior (mm) | 32     |
| C - Espesor (mm)           | 20,5   |
| Marca                      | IKO    |
| Unidad de venta            | pieza  |

