


Aro acero interior IRT4512-IKO

IRT4512-IKO



| Shaft<br>dia.<br>mm | Identification number | Mass<br>(Ref.)<br>g | Boundary dimensions<br>mm |    |      |                   |                | Standard mounting<br>dimension mm | Assembled bearings |                   |           |
|---------------------|-----------------------|---------------------|---------------------------|----|------|-------------------|----------------|-----------------------------------|--------------------|-------------------|-----------|
|                     |                       |                     | d                         | F  | B    | r <sub>s</sub> mm | d <sub>2</sub> |                                   | TA...Z<br>(TAM)    | TLA...Z<br>(TLAM) | YT<br>YTL |
| 45                  | IRT 4512              | 36                  | 45                        | 50 | 12.5 | 0.6               | 49             | 49.5                              | TA 5012Z           | —                 | —         |

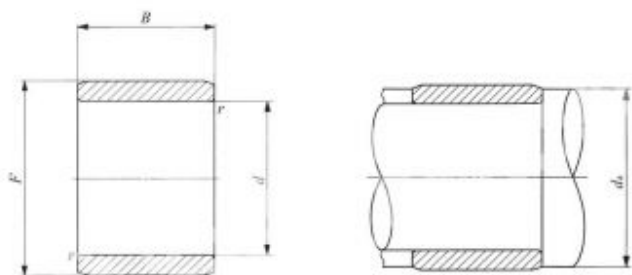

**Aro acero interior IRT4512-IKO**

| Caractéristique            | Valeur |
|----------------------------|--------|
| d - Diámetro interior (mm) | 45     |
| D - Diámetro exterior (mm) | 50     |
| C - Espesor (mm)           | 12,5   |
| Marca                      | IKO    |
| Unidad de venta            | pieza  |

