


Aro acero interior IRT5545-IKO

IRT5545-IKO



| Shaft<br>dia.<br><br>mm | Identification number | Mass<br>(Ref.)<br><br>g | Boundary dimensions<br>mm |    |      |                     | Standardizing<br>series mm |      | Assembled bearings |                   |           |
|-------------------------|-----------------------|-------------------------|---------------------------|----|------|---------------------|----------------------------|------|--------------------|-------------------|-----------|
|                         |                       |                         | d                         | F  | B    | r <sub>s</sub> (11) | d <sub>s</sub>             |      | TA...Z<br>(TAM)    | TLA...Z<br>(TLAM) | YT<br>YTL |
|                         |                       |                         |                           |    |      |                     | Min.                       | Max. |                    |                   |           |
| 55                      | IRT 5545              | 330                     | 55                        | 65 | 45.5 | 1.5                 | 63                         | 63.5 | TAW 6545Z          | —                 | —         |

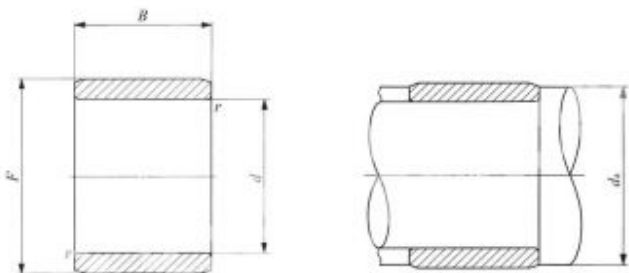

**Aro acero interior IRT5545-IKO**

| Caractéristique            | Valeur |
|----------------------------|--------|
| d - Diámetro interior (mm) | 55     |
| D - Diámetro exterior (mm) | 65     |
| C - Espesor (mm)           | 45,5   |
| Marca                      | IKO    |
| Unidad de venta            | pieza  |

