


Aro acero interior IRB1812-IKO

IRB1812-IKO



| Shaft dia.<br>mm<br>(inch) | Identification number | Mass<br>(ref.)<br>g | Boundary dimensions<br>mm(inch) |                |       | Standard mounting<br>dimensions mm |                        |                             | Assembled bearings |                   |           |
|----------------------------|-----------------------|---------------------|---------------------------------|----------------|-------|------------------------------------|------------------------|-----------------------------|--------------------|-------------------|-----------|
|                            |                       |                     | d                               | F              | B     | d <sub>s</sub><br>Min.             | d <sub>s</sub><br>Max. | r <sub>ts</sub> min<br>Max. | BA...Z<br>(BAM)    | BHA...Z<br>(BHAM) | YB<br>YBH |
| 28.575<br>(1 1/4)          | IRB 1812              | 47                  | 28.575 (1 1/4)                  | 34.925 (1 1/2) | 19.43 | 33.2                               | 33.9                   | 0.6                         | BA 2212Z           | BHA 2212Z         | YB 2212   |

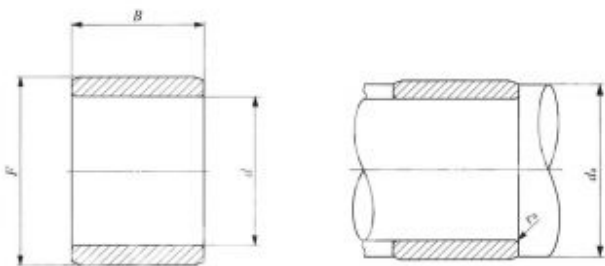

**Aro acero interior IRB1812-IKO**

| Caractéristique            | Valeur |
|----------------------------|--------|
| d - Diámetro interior (mm) | 28,58  |
| D - Diámetro exterior (mm) | 34,93  |
| C - Espesor (mm)           | 19,43  |
| Marca                      | IKO    |
| Unidad de venta            | pieza  |

