


Manguito de fijación HE209-SKF

HE209-SKF



| Principal dimensions |    |                |                |    |                |         | Mass | Designations                                     | Appointing | Appro-                     |
|----------------------|----|----------------|----------------|----|----------------|---------|------|--------------------------------------------------|------------|----------------------------|
| d <sub>1</sub>       | d  | d <sub>3</sub> | R <sub>1</sub> | B  | R <sub>4</sub> | G       | kg   | Adaptor sleeve with<br>nut and locking<br>device | lock nut   | priate<br>hydraulic<br>nut |
| in./mm               | mm |                |                |    |                |         |      |                                                  |            |                            |
| 1 1/2<br>38.1        | 45 | 65             | 33             | 10 | 33             | M45x1.5 | 0.2  | HE 209                                           | HM 9       | HM 9                       |

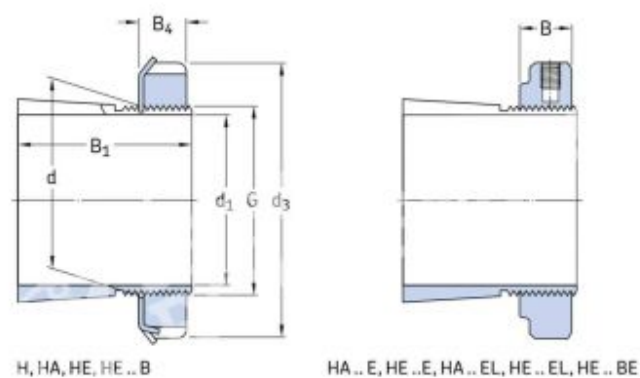

**Manguito de fijación HE209-SKF**

| Caractéristique       | Valeur |
|-----------------------|--------|
| Longitud (mm)         | 33     |
| dA - Diámetro del eje | 38,1   |
| Marca                 | SKF    |
| Diámetro sobre tuerca | 65     |
| Unidad de venta       | pieza  |

