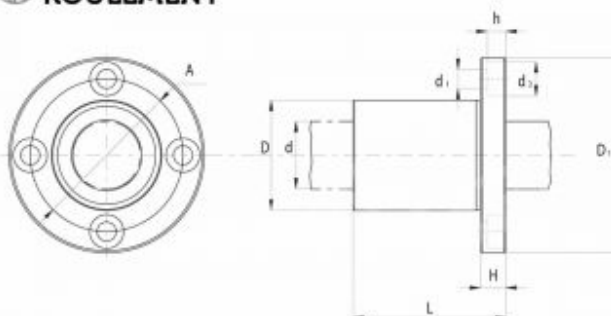


Casquillo de bolas KBF60-PP

KBF60-PP


**LE BON
ROULEMENT**


Type	Number of balls	Weight (kg)	d (mm)	d Tolerance (µm)	D (mm)	D Tolerance (µm)	L (mm)	L Tolerance (µm)	D1 (mm)	D1 Tolerance (µm)
KBF 60	6	3.100	60	+13 +2	90	0 -15	125	0 +0.4	134	0 +0.3

Type	W (mm)	A (mm)	d1 x d2 x h (mm)	Tolerance perpendicularity calligraphic Perpendicularity Range tolerance (µm)	Excentricité max Max eccentricity (µm)	Tolerance jeu radial Radial clearance tolerance (µm)	Capacité de Charge Load capacity rating (N)
KBF 60	18	112	11 x 17.5 x 12.8	25	25	13	C 4900 10200



Casquillo de bolas KBF60-PP

Caractéristique	Valeur
d - Diámetro interior (mm)	60
D - Diámetro exterior (mm)	90
C - Espesor (mm)	125
Marca	Genérica alta calidad
Tipo del rodamiento	Casquillo de bolas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Rodamiento serie	KBF
Diámetro exterior sobre collarín	134
Unidad de venta	pieza

