


Casquillo de bolas KBH12-PP

KBH12-PP

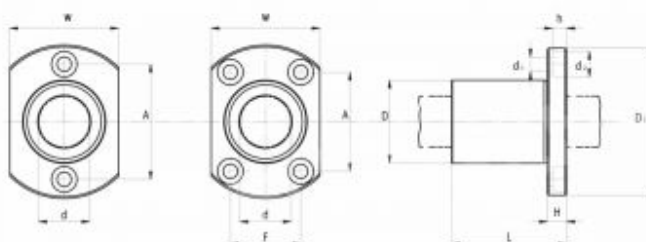

Type	Number of balls	Height (mm)	d (mm)	d Tolerance (mm)	D (mm)	D Tolerance (mm)	L (mm)	L Tolerance (mm)	D ₁ (mm)	D ₁ Tolerance (mm)
KBH 12	4	0.068	12	0 + .09	21	0 + .13	30	0 + .0.2	42	0 + .0.2

Type	W (mm)	H (mm)	A (mm)	F (mm)	d1 and d2 (mm)	Tolerance perpendicularity collar (mm)	Excentricité max (mm)	Tolerance jeu radial (mm)	Capacité de charge (N)
KBH 12	27	6	32	-	6.5 x 8 x 4.6	12	12	-5	420 610



Casquillo de bolas KBH12-PP

Caractéristique	Valeur
d - Diámetro interior (mm)	12
D - Diámetro exterior (mm)	21
C - Espesor (mm)	30
Marca	Genérica alta calidad
Tipo del rodamiento	Casquillo de bolas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Rodamiento serie	KBH
Diámetro exterior sobre collarín	42
Unidad de venta	pieza

