


KBH25-PP



Type Type	Number of ball rows	Pitch Module mm	d (mm)	d Tolerance (μ m)	D (mm)	D Tolerance (μ m)	L (mm)	L Tolerance (μ m)	D ₁ (mm)	D ₁ Tolerance (μ m)
KRM 35	6	0.325	25	0 + .10	40	0 + .16	59	0 + .03	62	0 + .03

Type Type	W (mm)	H (mm)	A (mm)	F (mm)	d1ad2ah (mm)	Tolerance perpendicularity collet Perpendicularity flange tolerance (µm)	Excentricité max Max eccentricity (µm)	Tolerance au radial Radial clearance tolerance (µm)	Capacité de Charge Load capacity rating (N)
									C ₁ C ₂
KRM 25	46	8	40	32	5,5 x 9,5 x 5,4	15	15	.9	1000 1400

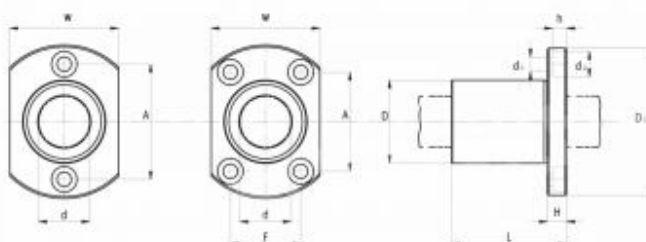

Casquillo de bolas KBH25-PP

Caractéristique	Valeur
d - Diámetro interior (mm)	25
D - Diámetro exterior (mm)	40
C - Espesor (mm)	59
Marca	Genérica alta calidad
Tipo del rodamiento	Casquillo de bolas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Rodamiento serie	KBH
Diámetro exterior sobre collarín	62
Unidad de venta	pieza

