

Casquillo de bolas KB30-INA

KB30-INA

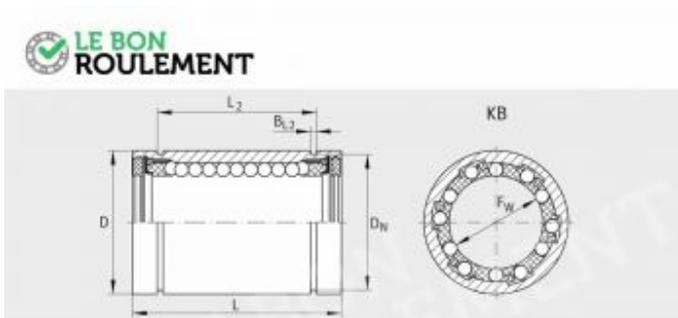


Tableau de dimensions (en mm)

Désignation			Masse m	Dimensions			Cotes adjacentes			
				F _w	D	L	B ₂	L ₂	B ₁₂	
			-g	Tolérances	h5	h12		H13		
KB30	KB30-PP	KB30-PP-AS	300	30	+0,011 -0,000	47	68	-	51,7	1,85
KB310	KB310-PP	KB310-PP-AS	240					11,6		

B ₁	D _n	T ₁	N _L	N ₂	n	β	Nombre	Charges de base			
								dyn. C _{0max} N	stat. C _{0max} N	dyn. C _{max} N	stat. C _{max} N
-	44,5	-	-	2,5	-	-	6	3600	2850	3800	3600
3		1,5	3		54	55	5	-	-	3700	3800



Casquillo de bolas KB30-INA

Caractéristique	Valeur
d - Diámetro interior (mm)	30
D - Diámetro exterior (mm)	47
C - Espesor (mm)	68
Marca	INA
Tipo del rodamiento	Casquillo de bolas
Tipo de sellado	No estanco
Rodamiento serie	KB - LME
Unidad de venta	pieza

