

Casquillo de bolas KH25-PP-RR-INA

KH25-PP-RR-INA



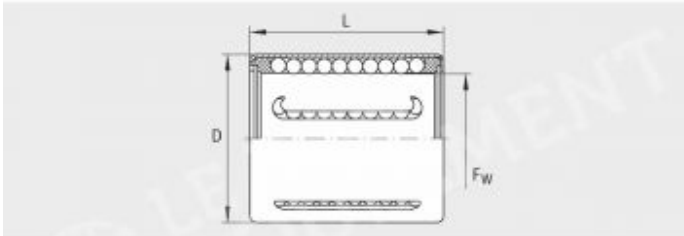


Tableau de dimensions (en mm)											
Désignation	Masse	Dimensions			Cotes adjacentes		Charges de base				
	m	F _W	D	L	I ₁₄	N ₂	dyn. C _{0 min} N	stat. C _{0 min} N	dyn. C _{max} N	stat. C _{0 max} N	
KH25	KH25-PP	66	25	35	40	8	2 280	1 670	2 420	2 130	



Casquillo de bolas KH25-PP-RR-INA

Caractéristique	Valeur
d - Diámetro interior (mm)	25
D - Diámetro exterior (mm)	35
C - Espesor (mm)	40
Marca	INA
Tipo del rodamiento	Casquillo de bolas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Especificaciones	RR : acero inoxidable
Rodamiento serie	KH - LNA
Unidad de venta	pieza

