

Casquillo de bolas KH30-PP-RR-INA

KH30-PP-RR-INA



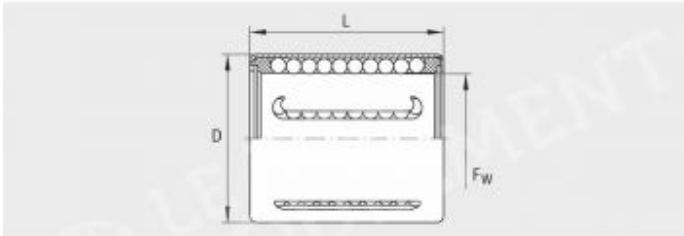


Tableau de dimensions (en mm)

Désignation		Masse	Dimensions			Cotes adjacentes		Charges de base			
			F_w	D	L	I_{14}	N_2	dyn. C_{0min} N	stat. C_{0min} N	dyn. C_{max} N	stat. C_{0max} N
KH30	KH30-PP	95	30	40	50	8	2,5	3 300	2 700	3 300	3 100



Casquillo de bolas KH30-PP-RR-INA

Caractéristique	Valeur
d - Diámetro interior (mm)	30
D - Diámetro exterior (mm)	40
C - Espesor (mm)	50
Marca	INA
Tipo del rodamiento	Casquillo de bolas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Especificaciones	RR : acero inoxidable
Rodamiento serie	KH - LNA
Unidad de venta	pieza

