

Casquillo de bolas KH50-PP-INA

KH50-PP-INA

 **LE BON ROULEMENT**

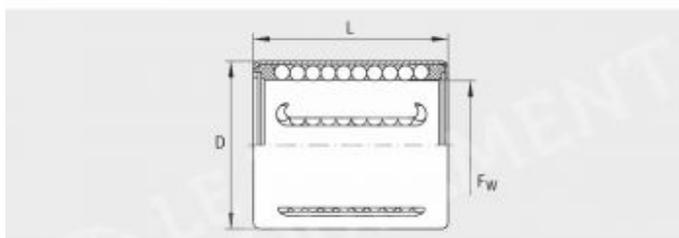


Tableau de dimensions (en mm)

| Désignation | Masse m | Dimensions | | | Cotes adjacentes | | Charges de base | | | |
|--------------|------------|----------------|----|----|------------------|----------------|---------------------------------|----------------------------------|-------------------------------|----------------------------------|
| | | F _w | D | L | I ₁₄ | N ₂ | dyn. C _{0 min} N | stat. C _{0 max} N | dyn. C _{max} N | stat. C _{0 max} N |
| KH50 KH50-PP | 252 | 50 | 62 | 70 | 9 | 2,5 | 6 800 | 6 300 | 6 800 | 7 000 |



Casquillo de bolas KH50-PP-INA

| Caractéristique | Valeur |
|----------------------------|--|
| d - Diámetro interior (mm) | 50 |
| D - Diámetro exterior (mm) | 62 |
| C - Espesor (mm) | 70 |
| Marca | INA |
| Tipo del rodamiento | Casquillo de bolas |
| Tipo de sellado | Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE) |
| Rodamiento serie | KH - LNA |
| Unidad de venta | pieza |

