

Casquillo de bolas KN20-B-INA

KN20-B-INA



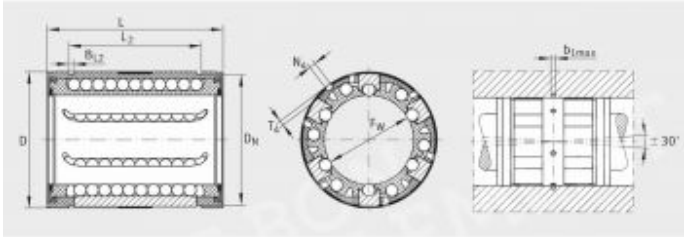


Tableau de dimensions (en mm)					Masse		Dimensions		Cotes adjacentes		
Désignation					m	mG	F ₀	D	L	Cotes adjacentes	
										B ₂	L ₂
KN20-B-PP	KN20-B	-	-	-	60	-	20	32	45	-	31,2
-	-	KN020-B-PP	KN020-B	-	50	-	-	-	-	9	-

					Rangées de billes		Charges de base				Accessoires		
B _{1,2}	D _H	r _A	A _{CO}	N ₄	n	e	b _{1 max}	dyn.		stat.		Anneau d'arrêt approprié DIN 671	
								C _{0 min} N	C _{0 min} M	C _{0 max} N	C _{0 max} M		
3,6	30,7	0,9	-	3	-	-	2,5	6	1 730	1 230	1 830	1 570	32K1,5
-	-	-	-	-	55	-	-	5	-	-	1 740	1 240	-



Casquillo de bolas KN20-B-INA

Caractéristique	Valeur
d - Diámetro interior (mm)	20
D - Diámetro exterior (mm)	32
C - Espesor (mm)	45
Marca	INA
Tipo del rodamiento	Casquillo de bolas
Tipo de sellado	No estanco
Rodamiento serie	KN
Unidad de venta	pieza

