

Casquillo de bolas KNO25-B-PP-INA

KNO25-B-PP-INA

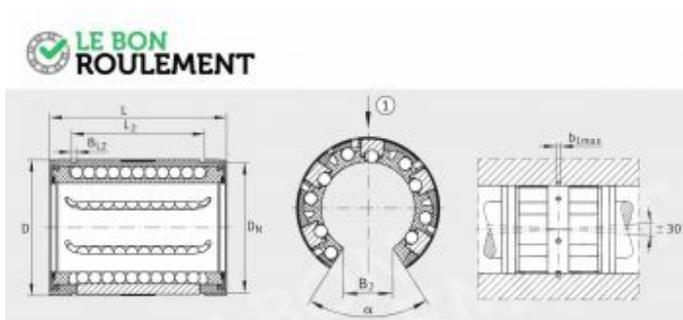


Tableau de dimensions (en mm)

Désignation				Masse m mg	Dimensions			Cotes adjacentes	
					F ₀	D	L	B ₂	L ₂
KNO25-B-PP	KNO25-B	-	-	110	25	40	58	-	43,7
-	-	KNO25-B-PP	KNO25-B	110	-	-	-	11,5	-

B _{1,2}	D _H	r _s	A ₁₀	N _s	α	d _{1 max}	Rangées de billes		Charges de base				Accessoires Anneau d'arrêt approprié DM 471
							Nombre		dyn. C _{0 min} N	stat. C _{0 min} N	dyn. C _{0 max} N	stat. C _{0 max} N	
1,85	38,5	1,4	-	3	-	2,5	6	3100	2200	3250	2850	42K1,75	
-	-	-	1,5	-	57	-	5	-	-	3100	2260	-	



Casquillo de bolas KNO25-B-PP-INA

Caractéristique	Valeur
d - Diámetro interior (mm)	25
D - Diámetro exterior (mm)	40
C - Espesor (mm)	58
Marca	INA
Tipo del rodamiento	Casquillo de bolas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Rodamiento serie	KNO
Unidad de venta	pieza

