

Casquillo de bolas KNO40-B-PP-INA

KNO40-B-PP-INA

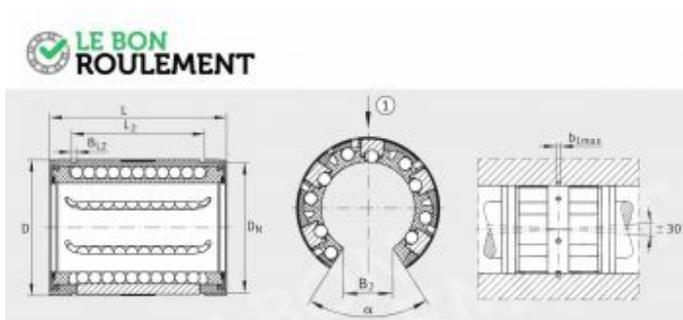


Tableau de dimensions (en mm)

Désignation				Masse m mg	Dimensions			Cotes adjacentes	
					F ₀	D	L	B ₂	L ₂
KNA0-B-PP	KNA0-B	-	-	350	40	62	80	-	H13
-	-	KNO40-B-PP	KNO40-B	300	-	-	-	19	-

B _{1,2}	D _H	r _s	A _{CO}	N _s	α	Rangées de billes		Charges de base				Accessoires Anneau d'arrêt approprié DM 471
						d _{1 max}	Nombre	dyn. C _{0 min} N	stat. C _{0 min} N	dyn. C _{0 max} N	stat. C _{0 max} N	
2,15	59,4	2,2	-	3	-	3	6	6 300	4 350	6 700	5 600	63K2
-	-	-	1,5	56	-	5	-	-	6 300	4 350	-	-



Casquillo de bolas KNO40-B-PP-INA

Caractéristique	Valeur
d - Diámetro interior (mm)	40
D - Diámetro exterior (mm)	62
C - Espesor (mm)	80
Marca	INA
Tipo del rodamiento	Casquillo de bolas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Rodamiento serie	KNO
Unidad de venta	pieza

