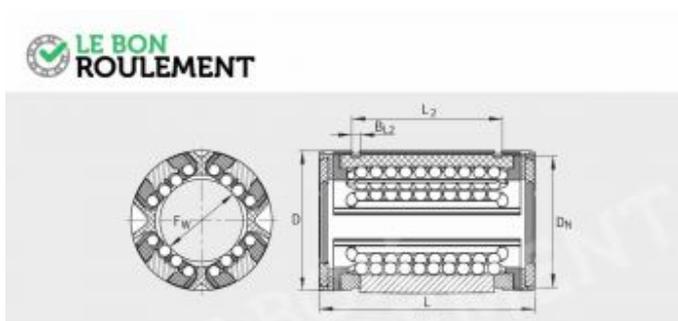


## Casquillo de bolas KS12-INA

KS12-INA



**Tableau de dimensions (en mm)**

Designation				Masse m —g	Dimensions			Cotes adjacentes		
					F <sub>w</sub>	D	L	B <sub>2</sub>	L <sub>2</sub>	B <sub>12</sub>
KS12	KS12-PP	—	—	1,8	12	22	32	—	22,6	1,3
—	—	KS012	KS012-PP	13	—	—	—	7,6	—	—

D <sub>h</sub>	A <sub>10</sub>	B <sub>1</sub>	H <sub>1</sub>	n	z	Charges de base			
						rangées de billes		stat.	
				Nombre		dyn. C <sub>0</sub> min N	stat. C <sub>0</sub> min H	dyn. C <sub>max</sub> N	stat. C <sub>max</sub> M
21	—	—	3	—	8	630	600	900	1100
—	—	3	3	78	6	—	—	900	1100



**Casquillo de bolas KS12-INA**

<b>Caractéristique</b>	<b>Valeur</b>
d - Diámetro interior (mm)	12
D - Diámetro exterior (mm)	22
C - Espesor (mm)	32
Marca	INA
Tipo del rodamiento	Casquillo de bolas
Tipo de sellado	No estanco
Rodamiento serie	KS
Unidad de venta	pieza

