

## Casquillo de bolas KS16-PP-INA

KS16-PP-INA

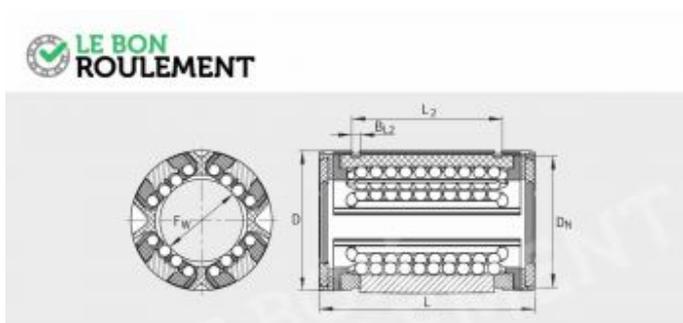


Tableau de dimensions (en mm)

Designation				Masse m —g	Dimensions			Cotes adjacentes		
					F <sub>W</sub>	D	L	B <sub>1,2</sub>	L <sub>2</sub>	B <sub>1,2</sub>
KS16	KS16-PP	—	—	28	16	26	36	—	24,6	1,3
—	—	KS016	KS016-PP	19	—	—	—	10,1	—	—

D <sub>n</sub>	A <sub>10</sub>	B <sub>1</sub>	B <sub>2</sub>	n	z	Charges de base			
						rangées de billes		stat.	
				Nombre		dyn. C <sub>10</sub>	stat. C <sub>0</sub> min	dyn. C <sub>1000</sub>	stat. C <sub>0</sub> max
						N	H	N	M
25	—	3 <sup>H</sup>	3 <sup>H</sup>	—	8	1060	950	1430	1550
—	—	—	—	78	8	—	—	1430	1550



**Casquillo de bolas KS16-PP-INA**

<b>Caractéristique</b>	<b>Valeur</b>
d - Diámetro interior (mm)	16
D - Diámetro exterior (mm)	26
C - Espesor (mm)	36
Marca	INA
Tipo del rodamiento	Casquillo de bolas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Rodamiento serie	KS
Unidad de venta	pieza

