

Casquillo de bolas KSO16-PP-INA

KSO16-PP-INA

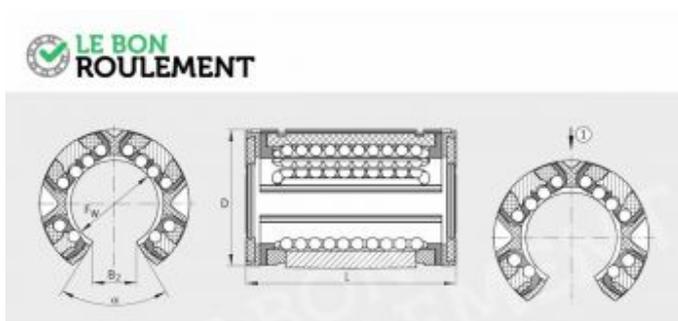


Tableau de dimensions (en mm)

Désignation				Masse m —g	Dimensions			Cotes adjacentes		
					F_{10}	D	L	B_2	L_2	B_{12}
K514	K514-PP	—	—	28	16	26	36	—	24,6	1,3
—	—	KSO16	KSO16-PP	19	—	—	—	10,1	—	—

D_{10}	A_{10}	B_1	H_1	α	Rangées de billes		Charges de base			
					Nombre	dyn. C_{10} N	stat. $C_{0\ 100}$ N	dyn. C_{100} N	stat. C_{1000} N	
25	—	3 ^H	3 ^H	—	8	1060	950	1430	1550	—
—	—	—	—	78	8	—	—	1430	1550	—



Casquillo de bolas KSO16-PP-INA

Caractéristique	Valeur
d - Diámetro interior (mm)	16
D - Diámetro exterior (mm)	26
C - Espesor (mm)	36
Marca	INA
Tipo del rodamiento	Casquillo de bolas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Rodamiento serie	KSO
Unidad de venta	pieza

