

Soporte de Casquillo lineal KTB50-PP-AS-INA

KTB50-PP-AS-INA

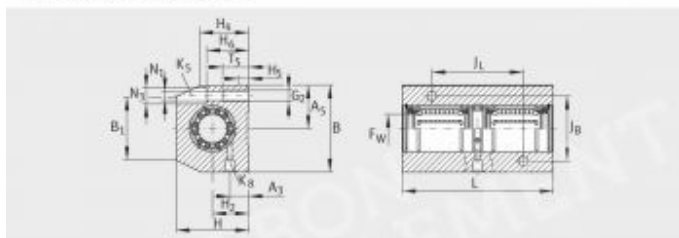


Tableau de dimensions (en mm)													
Désignation	Masse m	Dimensions						Cotes adjacentes					
		r_{fs}	B	L	H	l_0	A_0	B_0	B_1	B_2	l_1	H_2	
	mg	Tolérances				$\pm 0,15$					$\pm 0,15$	$\pm 0,015$	
KTB50-PP-AS	6 600	$+0,011$ $-0,022$	132	234	105	100	66	90	—	—	125	90	
—	KTB050-PP-AS	5 100	130	—	88	—	—	—	22,7	—	—	—	

											Vis de fixation		Charges de base	
H_4	A_0	H_5	r_1	H_6	N_1	N_2	G_2	G_3	K_0	α	K_5		dyn. C	stat. C_0
60	20	11,1	34	70	13	20	M16	M8X1	NIPA2	—	M12	—	12 600	14 100
—	14	—	—	77	—	—	—	—	—	54	—	M12	13 200	14 500



Soporte de Casquillo lineal KTB50-PP-AS-INA

Caractéristique	Valeur
Ancho (mm)	132
d - Diámetro interior (mm)	50
C - Espesor (mm)	224
Marca	INA
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Especificaciones	AS : reengrasable
Unidad de venta	pieza

