


KTSS20-PP-AS-INA



Désignation		Masse	Dimensions				Cotes adjacentes				
		m	f ₁₀	B	L	H	f ₈	B ₁	A ₅	l ₁	l ₀
		~g					±0,15		±0,01	±0,15	
KTSG20-PP-AS	~	550	20	60	96	50	45	44	30	76	33
~	KTSS20-PP-AS										

													Rangées de billes	Charges de base	
H ₂	H ₁	H ₄	T ₅	H ₆	G ₇	N ₁	H ₈	H ₁	K ₃	K ₄	Cote sur plots W	Nombre		d _{yn.} C _{max} N	stat. C _{max} N
25	7,4	34,1	18	24	M8	6,8	5	11	M6	NIP4M7	~ a	8	3 500	4 600	

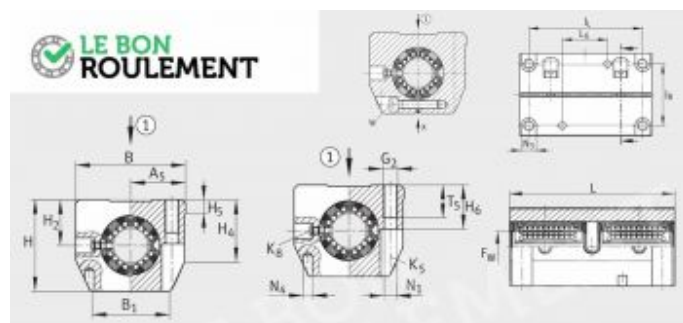

Soporte de Casquillo lineal KTSS20-PP-AS-INA

Caractéristique	Valeur
Ancho (mm)	60
d - Diámetro interior (mm)	20
C - Espesor (mm)	96
Marca	INA
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Especificaciones	AS : reengrasable
Unidad de venta	pieza

