


KTSS25-PP-AS-INA



Désignation	Masse m	Dimensions				Cotes adjacentes				
		f_{10}	B	L	H	l_1	B_1	A_1	l_1	l_0
STS525-PP-AS	—	—	—	—	—	±0,15	—	±0,01	±0,15	—
STS575-PP-AS	1,130	25	78	122	60	60	59,4	39	94	64

											Rangées de billes	Charges de base		
H ₂	H ₄	H ₅	H ₆	G ₂	N ₁	N ₄	N ₅	K ₁	K ₄	Cote sur plots W		Nombrre	d _{ext.} C _{ext}	d _{int.} C _{int} max
+0,008 -0,009														
30	8,3	41,5	22	29	M10	8,4	6	15	M8	NIPSMZ	— %	8	6 400	8 600

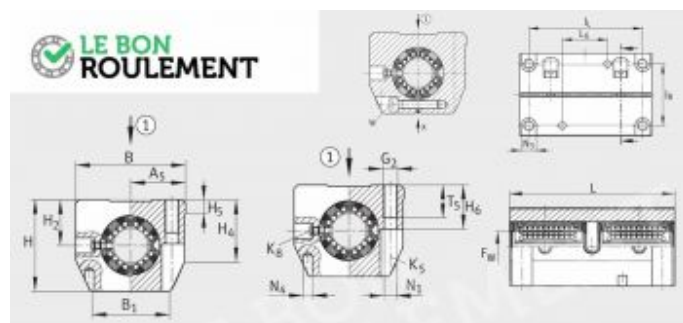

Soporte de Casquillo lineal KTSS25-PP-AS-INA

Caractéristique	Valeur
Ancho (mm)	78
d - Diámetro interior (mm)	25
C - Espesor (mm)	122
Marca	INA
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Especificaciones	AS : reengrasable
Unidad de venta	pieza

