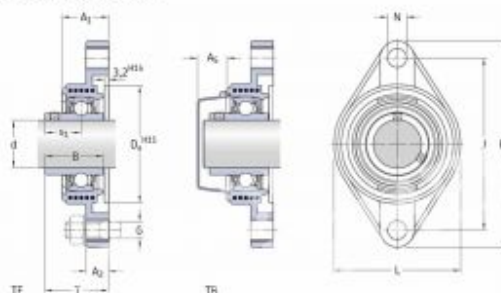


Unidad de rodamiento (compuesto) FYTBK30-TF-SKF

FYTBK30-TF-SKF


**LE BON
ROULEMENT**


Dimensions												Basic load ratings dynamic C	Fatigue load limit C ₀	Limiting speed with shaft tolerance H6	Designation Bearing unit	
d	A ₁	A ₂	B	D ₁	H	J	L	N	G	A ₃	T	kN	kN	r/min	-	
mm																
30	11	15	38.1	76.2	142.5	116.5	63	12	10	22.2	42.2	19.5	11.2	0.475	4 300	FYTBK 30 TF
	33	15	38.1	76.2	142.5	116.5	63	12	10	22.2	42.2	19.5	11.2	0.475	1 800	FYTBK 30 TR

Designations	Separate components		Mass	Appropriate and cover	
Bearing unit	Housing	Bearing	Bearing unit	Designation	Dimensions
			kg		mm
FYTBK 30 TF	FYTBK 50b	VAR 206-2F	0.44	ECY 206	20
FYTBK 30 TR	FYTBK 50b	VAR 206-2HF	0.44	ECY 206	20



Unidad de rodamiento (compuesto) FYTBK30-TF-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	30
Entrevía	116,5
Material	Compuesto
Marca	SKF
Tipo de soporte	Ovalado/a 2 agujeros
Rodamiento de soporte	Fijación con tornillos sin cabeza
Referencia del rodamiento	YAR206-2F-SKF
Referencia del soporte solo	FYTBK506-SKF
Unidad de venta	pieza

