FICHE TECHNIQUE

Unidad de rodamiento FYTJ40-KF-SKF

FYTJ40-KF-SKF

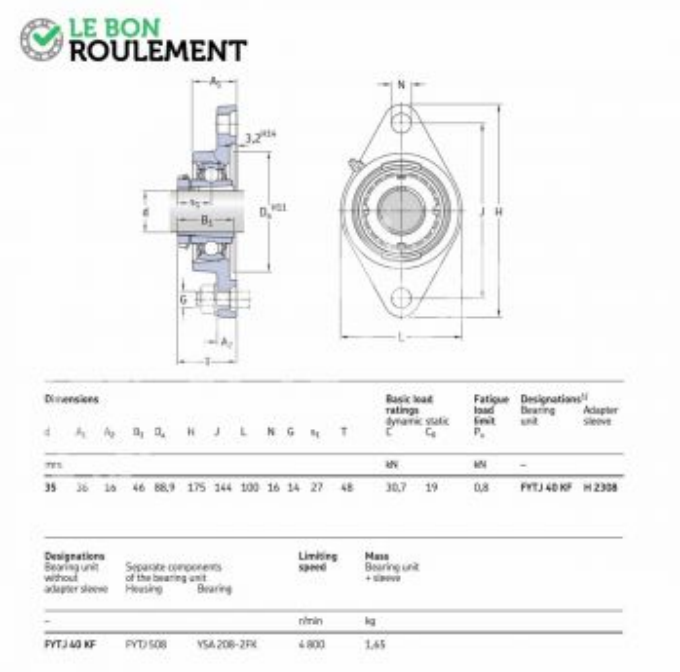

Dimensions												Basic load ratings dynamic	Basic load ratings static	Fatigue load limit	Designations[1] Bearing unit	Designations[1] Adapter sleeve
d	A_1	A_2	B_1	D_a	H	J	L	N	G	s_1	T	C	C_0	P_u		
mm												kN		kN	–	
35	36	16	46	88,9	175	144	100	16	14	27	48	30,7	19	0,8	FYTJ 40 KF	H 2308

Designations Bearing unit without adapter sleeve	Separate components of the bearing unit Housing	Bearing	Limiting speed	Mass Bearing unit + sleeve
–			r/min	kg
FYTJ 40 KF	FYTJ 508	YSA 208-2FK	4 800	1,65

Commander sur El Mejor Rodamiento

Contacter le service client

FICHE TECHNIQUE

Unidad de rodamiento FYTJ40-KF-SKF

Caractéristique	Valeur
d - Diámetro interior (mm)	35
Entrevía	144
Material	Fundición
Marca	SKF
Tipo de soporte	Ovalado/a 2 agujeros
Rodamiento de soporte	Fijación con manguito conico
Referencia del rodamiento	YSA208-2FK-SKF
Referencia del soporte solo	FYTJ508-SKF
Referencia del manguito	H2308-SKF
Unidad de venta	pieza

Commander sur El Mejor Rodamiento

Contacter le service client