


# Unidad de rodamiento (acero inoxidable) RASE20-N-FA125-INA

RASE20-N-FA125-INA

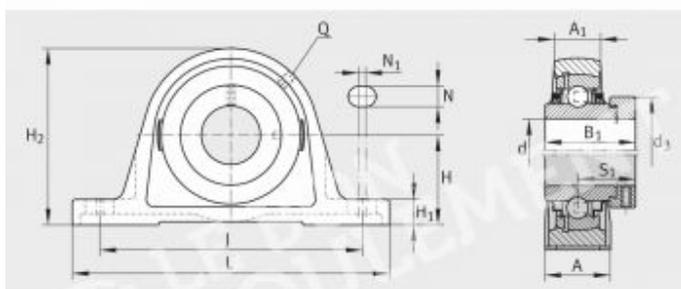

**Dimension table - Dimensions in mm**

Designation			Mass m —kg	Dimensions					
Unit	Housing	Radial insert ball bearing		d	H	L	A	A <sub>1</sub>	
<b>RASE20-N-FA125</b>	GG.A5E04-E-N-FA125.1	GE20-KBR-B-FA125.5	0,59	<b>20</b>	33,3	97	130	32	19

H <sub>1</sub>	H <sub>2</sub>	N	N <sub>1</sub>	B	B <sub>1</sub>	S <sub>1</sub>	Q	d <sub>3</sub>	Basic load ratings		End cap
									dyn. C <sub>r</sub> max.	stat. C <sub>0p</sub> N	
14,5	64	11	8	—	43,7	26,6	P <sub>0</sub> 1/8	33	12 800	6 600	KASK04



**Unidad de rodamiento (acero inoxidable) RASE20-N-FA125-INA**

Caractéristique	Valeur
d - Diámetro interior (mm)	20
Entrevía	97
Material	Acero inoxidable
Marca	INA
Tipo de soporte	De pie 2 agujeros
Rodamiento de soporte	Fijación por aro excéntrico
Referencia del rodamiento	GE20-KRR-B-FA125.5-INA
Referencia del soporte solo	GG.ASE04-E-N-FA125,1-INA
Unidad de venta	pieza

