


Unidad de rodamiento (acero inoxidable)
PASE45-FA125-INA
PASE45-FA125-INA

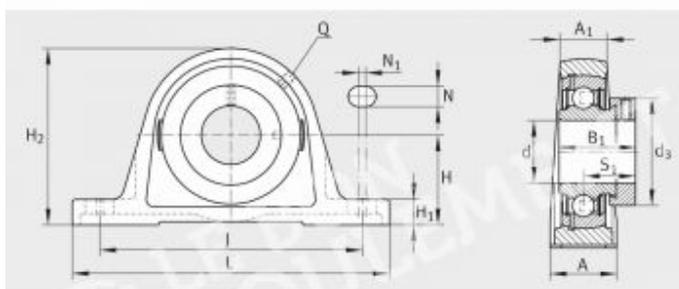

Dimension table (continued) - Dimensions in mm

| Designation | | | Mass m —kg | Dimensions | | | | | |
|--------------|------------------|----------------------------|------------------|------------|----|-----|-----|----|----------------|
| Unit | Housing | Radial insert ball bearing | | d | H | J | L | A | A ₁ |
| PASE45-FA125 | GG ASE09-FA125.1 | GRAE45-NPP-B-FA125.5 | 2,09 | 45 | 54 | 150 | 192 | 48 | 32 |

| H ₁ | H ₂ | N | N ₁ | B | B ₁ | S ₁ | Q | d ₃ max. | Basic load ratings | | End cap ²⁰ |
|----------------|----------------|----|----------------|---|----------------|----------------|--------------------|------------------------|-----------------------------|-------------------------------|-----------------------|
| | | | | | | | | | dyn. C _r N | stat. C _{0r} N | |
| 21,5 | 107 | 14 | 15 | — | 43,8 | 32,7 | R _e 1/8 | 63 | 32 500 | 20 400 | — |



Unidad de rodamiento (acero inoxidable) PASE45-FA125-INA

| Caractéristique | Valeur |
|-----------------------------|-----------------------------|
| d - Diámetro interior (mm) | 45 |
| Entrevía | 150 |
| Material | Acero inoxidable |
| Marca | INA |
| Tipo de soporte | De pie 2 agujeros |
| Rodamiento de soporte | Fijación por aro excéntrico |
| Referencia del rodamiento | GRAE45-NPP-B-FA125.5-INA |
| Referencia del soporte solo | GG.ASE09-FA125.1-INA |
| Unidad de venta | pieza |

