


# Unidad de rodamiento (acero inoxidable) PASE50-N-FA125-INA

PASE50-N-FA125-INA

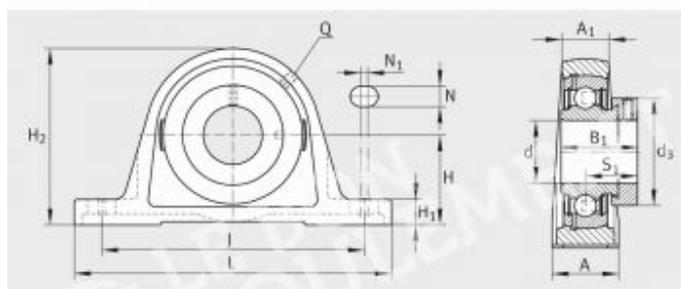

**Dimension table** (continued) - Dimensions in mm

Designation			Mass m —kg	Dimensions					
Unit	Housing	Radial insert ball bearing		d	H	J	L	A	A <sub>1</sub>
PASE50-N-FA125	GG ASE10-N-FA125.1	GRA50-NPP-B-FA125.5	2,47	50	57,2	158	200	54	34

H <sub>1</sub>	H <sub>2</sub>	N	N <sub>1</sub>	B	B <sub>1</sub>	S <sub>1</sub>	Q	d <sub>3</sub>	Basic load ratings		End cap <sup>20</sup>
									dyn. C <sub>r</sub> N	stat. C <sub>0r</sub> N	
21,5	115	18	5	—	43,8	32,7	R <sub>p</sub> 1/8	69	35 000	23 200	KASK10



**Unidad de rodamiento (acero inoxidable) PASE50-N-FA125-INA**

Caractéristique	Valeur
d - Diámetro interior (mm)	50
Entrevía	158
Material	Acero inoxidable
Marca	INA
Tipo de soporte	De pie 2 agujeros
Rodamiento de soporte	Fijación por aro excéntrico
Referencia del rodamiento	GRAE50-NPP-B-FA125.5-INA
Referencia del soporte solo	GG.ASE10-N-FA125.1-INA
Unidad de venta	pieza

