


# Unidad de rodamiento (acero inoxidable) PCJT20-N-FA125-INA

PCJT20-N-FA125-INA

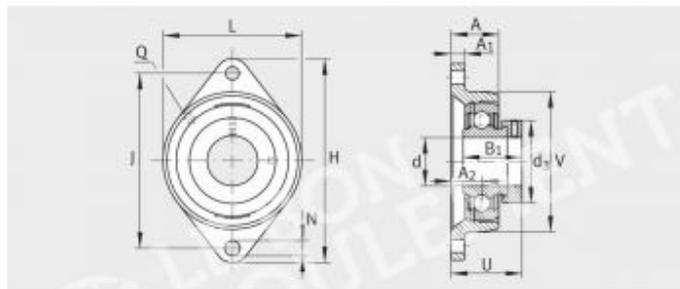

**Dimension table** / Dimensions in mm

Designation			Mass m =kg	Dimensions				
Unit	Housing	Radial insert ball bearing		d	L	H	A <sub>1</sub>	N
<b>PCJT20-N-FA125</b>	GG.CJT04-N-FA125.3	GRAE20-NPP-B-FA125.5	0,48	<b>20</b>	61	112	10	11,5

										Basic load ratings		End cap
B	B <sub>1</sub>	J	A <sub>2</sub>	Q	d <sub>1</sub> max.	A	U	V	dyn. C <sub>r</sub> N	stat. C <sub>0r</sub> N		
-	31	90	19	R <sub>p</sub> 1/8	33	28	42,5	61	12 800	6 600	NASK04	



**Unidad de rodamiento (acero inoxidable) PCJT20-N-FA125-INA**

<b>Caractéristique</b>	<b>Valeur</b>
d - Diámetro interior (mm)	20
Entrevía	90
Material	Acero inoxidable
Marca	INA
Tipo de soporte	Ovalado/a 2 agujeros
Rodamiento de soporte	Fijación por aro excéntrico
Referencia del rodamiento	GRAE20-NPP-B-FA125.5-INA
Referencia del soporte solo	GG.CJT04-N-FA125.1-INA
Unidad de venta	pieza

