


Unidad de rodamiento RCJT30-N-INA

RCJT30-N-INA

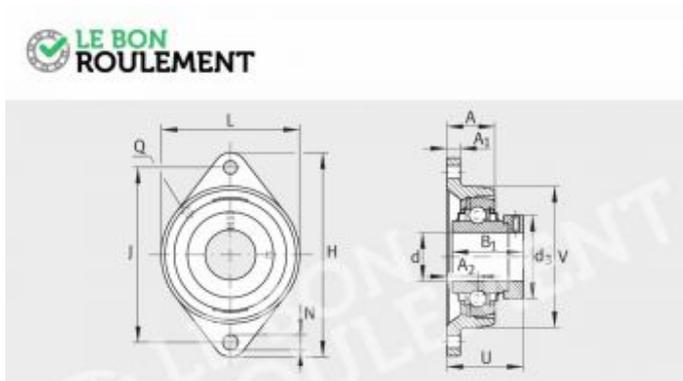

Dimensions table (continued) - Dimensions in mm

Designation			Mass m → kg	Dimensions					
Unit	Housing	Radial insert ball bearing		d	L	H	A ₁	N	
RCJT30-N	GG.CJT06-N	GE30-KRR-B	0,88	30	80	142	12	11,5	

B	B ₁	I	A ₂	Q	d ₅ max.	A	U	V	Basic load ratings		End cap
									dyn. C _r N	stat. C _{0e} N	
-	48,5	116,5	20	R ₀ 1/8	44	29	50,1	80	19 500	11 300	KASKOS



Unidad de rodamiento RCJT30-N-INA

Caractéristique	Valeur
d - Diámetro interior (mm)	30
Entrevía	116,5
Material	Fundición
Marca	INA
Tipo de soporte	Ovalado/a 2 agujeros
Rodamiento de soporte	Fijación por aro excéntrico
Referencia del rodamiento	GE30-KRR-B-INA
Referencia del soporte solo	GG.CJT06-N-INA
Unidad de venta	pieza

