


Casquillo de agujas YBH810-IKO

YBH810-IKO

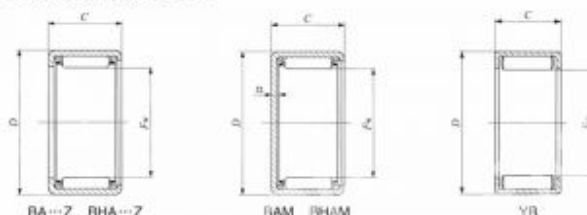

Shaft dia. mm (inch)	Identification number									
	Standard	Mass (Ref.) g	Closed end	Mass (Ref.) g	Standard	Mass (Ref.) g	Closed end	Mass (Ref.) g	Grease retained	Mass (Ref.) g
12.700 (1/2")	—	—	—	—	BHA 87 Z	9.1	BHAM 87	9.9	—	—
	—	—	—	—	BHA 88 Z	10.4	BHAM 88	11.3	—	—
	—	—	—	—	BHA 810 Z	12.5	BHAM 810	13.3	—	—
	—	—	—	—	BHA 812 Z	15	BHAM 812	15.8	—	—
									YBH 810	16

Boundary dimensions mm (inch)				Standard bearing dimensions mm				Basic static load rating	Basic dynamic load rating	Allowable rotational speed ⁽¹⁾	Assembled (inner ring)
F_w	D	C	f_1	Shaft dia. h6	Housing bore dia. J7	C'	C_1	N	N	rpm	
12.700 / ₂	19.050 / ₂	11.130, 4381	1.3	Max.	Min.	Max.	Min.	5 670	6 120	30 000	—
12.700 / ₂	19.050 / ₂	12.700, 5001	1.3					6 040	6 650	30 000	YBH 88
12.700 / ₂	19.050 / ₂	15.886, 6251	1.3	12.700	12.689	19.062	19.041	8 830	10 900	30 000	—
12.700 / ₂	19.050 / ₂	19.050, 7501	1.3					11 100	14 500	30 000	—
12.700 / ₂	19.050 / ₂	15.886, 6251	—					16 300	23 500	12 000	—



Casquillo de agujas YBH810-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	12,7
D - Diámetro exterior (mm)	19,05
C - Espesor (mm)	15,88
Marca	IKO
Tipo del rodamiento	Casquillo de agujas abierto
Tipo de sellado	No estanco
Rodamiento serie	YB
Unidad de venta	pieza

