


Casquillo de agujas YBH108-IKO

YBH108-IKO

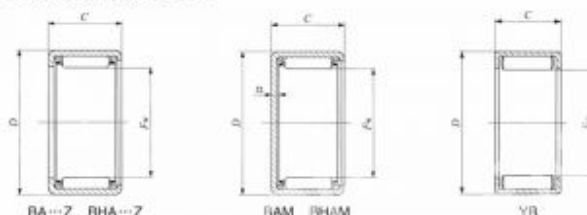

Shaft dia. mm (inch)	Identification number									
	Standard	Mass (Ref.) g	Closed end	Mass (Ref.) g	Standard	Mass (Ref.) g	Closed end	Mass (Ref.) g	Grease retained	Mass (Ref.) g
15.875 ($\frac{5}{8}$)	—	—	—	—	BHA 108 Z	12.8	BHAM 108	13.9	—	—
	—	—	—	—	BHA 1010 Z	14.9	BHAM 1010	16.2	—	—
	—	—	—	—	BHA 1012 Z	18	BHAM 1012	19.3	—	—
	—	—	—	—	BHA 1016 Z	24	BHAM 1016	25	—	—
	—	—	—	—	—	—	—	—	YBH 108	15.3

Boundary dimensions mm (inch)				Standard bearing dimensions mm				Basic static load rating C_0	Basic dynamic load rating C_1	Allowable rotational speed ⁽¹⁾	Assembled (inner ring)
F_w	D	C	f_2	Shaft dia. h6	Housing bore dia. J7	Max.	Min.	N	N	rpm	
15.875 $\frac{5}{8}$	22.225 $\frac{7}{8}$	12.701 $\frac{1}{2}$	1.3	15.875	15.864	22.237	22.216	8 680	8 020	25 000	IRB 68-1
15.875 $\frac{5}{8}$	22.225 $\frac{7}{8}$	15.881 $\frac{5}{8}$	1.3					10 200	13 800	25 000	—
15.875 $\frac{5}{8}$	22.225 $\frac{7}{8}$	19.051 $\frac{3}{4}$	1.3					12 700	18 500	25 000	IRB 612-1
15.875 $\frac{5}{8}$	22.225 $\frac{7}{8}$	25.401 1.000	1.3					17 400	27 600	25 000	IRB 716
15.875 $\frac{5}{8}$	22.225 $\frac{7}{8}$	12.701 $\frac{1}{2}$	—					16 000	22 400	9 500	IRB 68-1



Casquillo de agujas YBH108-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	15,88
D - Diámetro exterior (mm)	22,23
C - Espesor (mm)	12,7
Marca	IKO
Tipo del rodamiento	Casquillo de agujas abierto
Tipo de sellado	No estanco
Rodamiento serie	YB
Unidad de venta	pieza

