


Casquillo de agujas YB2012-IKO

YB2012-IKO

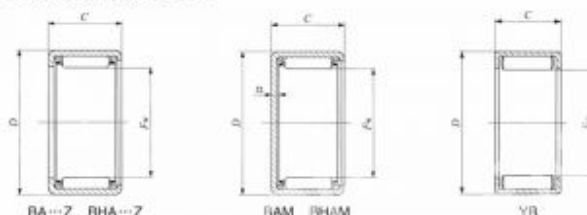

Shaft dia. mm (inch)	Identification number									
	Standard	Mass (Ref.) g	Closed end	Mass (Ref.) g	Standard	Mass (Ref.) g	Closed end	Mass (Ref.) g	Grease retained	Mass (Ref.) g
31.750 (1 1/2")	---	---	---	---	---	---	---	---	YB 2010	35
									YB 2012	42.5
									YB 2016	57
									YB 2018	64
									YB 2020	68

Boundary dimensions mm (inch)				Standard mounting dimensions mm				Basic rated load rating C_0	Basic rated load rating C_0	Allowable rotational speed ⁽¹⁾ rpm	Assembled inner ring
F_w	D	C	r_1 Max.	Shaft dia. H8 Max. Min.	Housing bore dia. J7 Max. Min.	C	C_0	C_0	C_0		
31.750 (1 1/2")	38.100 (1 1/2")	15.88 (.625)	---			27 000	59 000	4 500	IRB 1610		
31.750 (1 1/2")	38.100 (1 1/2")	19.05 (.750)	---			31 800	72 500	4 500	IRB 1612		
31.750 (1 1/2")	38.100 (1 1/2")	25.40 (1.000)	---	31.750	31.734	38.114	38.089	40 900	100 000	4 500	IRB 1616
31.750 (1 1/2")	38.100 (1 1/2")	28.58 (1.125)	---			45 300	114 000	4 500	---		
31.750 (1 1/2")	38.100 (1 1/2")	31.78 (1.250)	---			49 400	128 000	4 500	IRB 1620		



Casquillo de agujas YB2012-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	31,75
D - Diámetro exterior (mm)	38,1
C - Espesor (mm)	19,05
Marca	IKO
Tipo del rodamiento	Casquillo de agujas abierto
Tipo de sellado	No estanco
Rodamiento serie	YB
Unidad de venta	pieza

