


Casquillo de agujas YB2020-IKO

YB2020-IKO

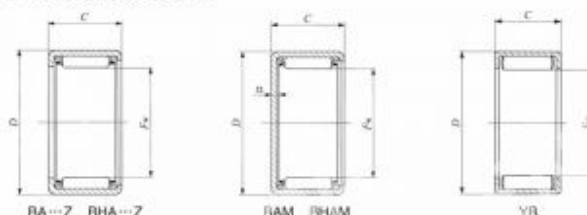

Shaft dia. mm (inch)	Identification number									
	Standard	Mask (Ref.) Q	Closed end	Mask (Ref.) Q	Standard	Mask (Ref.) Q	Closed end	Mask (Ref.) Q	Grease retained (Ref.) Q	Mask (Ref.) Q
31.750 (1 1/4")	---	---	---	---	---	---	---	---	YB 2010	35
									YB 2012	42.5
									YB 2016	57
									YB 2018	64
									YB 2020	68

Boundary dimensions mm (inch)				Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring
F_w	D	C	r_1 Max.	Shaft dia. H8 Max. Min.	Housing bore dia. J7 Max. Min.	C	C_0	C	C_0	rpm	
31.750 (1 1/4)	38.100 (1 1/2)	15.88 (.625)	---			27 000	59 000	4 500	IRB 1610		
31.750 (1 1/4)	38.100 (1 1/2)	19.05 (.750)	---			31 800	72 500	4 500	IRB 1612		
31.750 (1 1/4)	38.100 (1 1/2)	25.40 (1.000)	---	31.750	31.734	38.114	38.089	40 900	100 000	4 500	IRB 1616
31.750 (1 1/4)	38.100 (1 1/2)	28.58 (1.125)	---			45 300	114 000	4 500	---		
31.750 (1 1/4)	38.100 (1 1/2)	31.78 (1.250)	---			48 400	128 000	4 500	IRB 1620		



Casquillo de agujas YB2020-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	31,75
D - Diámetro exterior (mm)	38,1
C - Espesor (mm)	31,75
Marca	IKO
Tipo del rodamiento	Casquillo de agujas abierto
Tipo de sellado	No estanco
Rodamiento serie	YB
Unidad de venta	pieza

