


Casquillo de agujas YB2416-IKO

YB2416-IKO

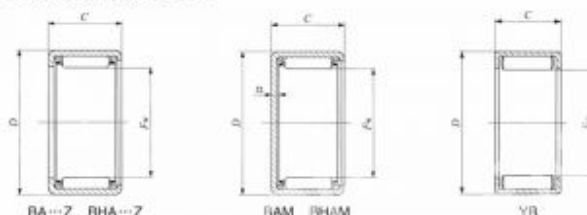

Shaft dia. mm (inch)	Identification number									
	Standard	Mass (Ref.) g	Closed end	Mass (Ref.) g	Standard	Mass (Ref.) g	Closed end	Mass (Ref.) g	Grease retained	Mass (Ref.) g
38.100 (1 1/2)	---	---	---	---	---	---	---	---	YB 246	38
	---	---	---	---	---	---	---	---	YB 248	51.5
	---	---	---	---	---	---	---	---	YB 2414	91
	---	---	---	---	---	---	---	---	YB 2416	106
	---	---	---	---	---	---	---	---	YB 2420	131

Boundary dimensions mm (inch)				Standard mounting dimensions mm				Basic rated load ring	Basic rated load ring	Allowable rotational speed ⁽¹⁾	Assembled inner ring
F_a	D	C	r_1	Shaft dia. H8 Max. Min.	Housing bore dia. J7 Max. Min.	C	r_1	C_0	C_0	rpm	
38.100 (1 1/2)	47.625 (1 7/8)	9.521 (.375)	---	---	---	---	---	21 000	34 100	4 000	---
38.100 (1 1/2)	47.625 (1 7/8)	12.701 (.500)	---	---	---	---	---	28 700	50 900	4 000	---
38.100 (1 1/2)	47.625 (1 7/8)	22.221 (.875)	---	38.100	38.084	47.639	47.614	48 900	101 000	4 000	IRB 2014
38.100 (1 1/2)	47.625 (1 7/8)	25.401 (1.000)	---	---	---	---	---	55 100	118 000	4 000	IRB 2016
38.100 (1 1/2)	47.625 (1 7/8)	31.751 (1.250)	---	---	---	---	---	66 800	151 000	4 000	IRB 2020



Casquillo de agujas YB2416-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	38,1
D - Diámetro exterior (mm)	47,63
C - Espesor (mm)	25,4
Marca	IKO
Tipo del rodamiento	Casquillo de agujas abierto
Tipo de sellado	No estanco
Rodamiento serie	YB
Unidad de venta	pieza

