


Casquillo de agujas TAW6050-Z-IKO

TAW6050-Z-IKO


**LE BON
ROULEMENT**

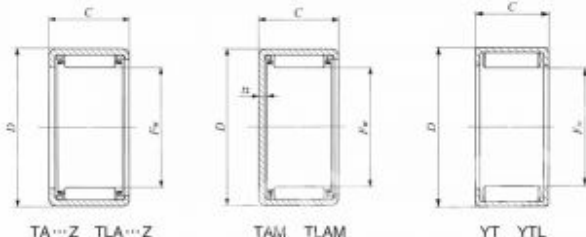

TA...Z TLA...Z TAM TLAM YT YTL

Shaft dia. mm	Identification number												
	Standard	Mass (Ref.) g	Closed end	Mass (Ref.) g	Standard	Mass (Ref.) g	Closed end	Mass (Ref.) g	Grease retained	Mass (Ref.) g			
60	TA 6025 Z	158	TAM 6025	182	—	—	—	—	—	—			
	TA 6030 Z	191	TAM 6030	215	—	—	—	—	—	—			
	TA 6040 Z	250	TAM 6040	275	—	—	—	—	—	—			
	TAW 6045 Z	270	TAMW 6045	295	—	—	—	—	—	—			
	TAW 6050 Z	306	TAMW 6050	330	—	—	—	—	—	—			
Boundary dimensions mm		Standard mounting dimensions mm						Ball dynamic load rating C _r	Ball static load rating C ₀	Allowable rotational speed ¹⁾	Assembled inner ring		
F _w	D	C	l ₂ Max.	Shaft dia. h6		Housing bore dia. H7		N	N	rpm			
				Max.	Min.	Max.	Min.						
60	72	25	3.4	60.000	59.981	72.018	71.988	—	—	54 700	108 000	5 000	IRT 5825
60	72	30	3.4							66 300	139 000	5 000	IRT 5830
60	72	40	3.4							85 700	183 000	5 000	IRT 5840
60	72	45	3.4							86 400	183 000	5 000	IRT 5845
60	72	50	3.4							97 000	229 000	5 000	IRT 5850



Casquillo de agujas TAW6050-Z-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	60
D - Diámetro exterior (mm)	72
C - Espesor (mm)	50
Marca	IKO
Tipo del rodamiento	Casquillo de agujas abierto
Tipo de sellado	No estanco
Especificaciones	Jaula doble
Rodamiento serie	TA
Unidad de venta	pieza

