


Rodillo de apoyo KRVE19-PP

KRVE19-PP

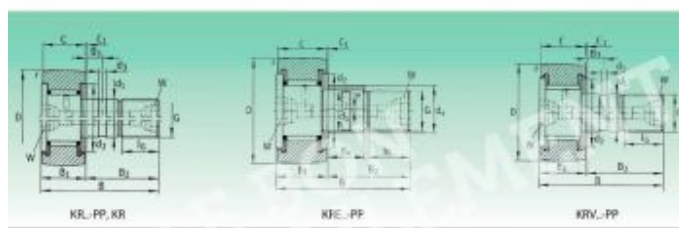

Diamètre nominal (mm) Outside bearing ring	Type Designation				Dimensions (mm) Dimensions (mm)											
	Series Série	Profile Profil	Material Matériau	Finish Finition	D	d_1 $\varnothing$	B	B_1	B_2	B_3	C	C_1	r mm	d_2	d_3	
19	KRVE19-PP	20	KRVE19-PP	32	19	8	32	12.2	20	-	11	0.8	0.15	15	-	

Dimensions (mm) Dimensions (mm)				Material Matériau	Coefficient of friction Coefficient de frottement	Dynamic load rating Charge dynamique	Static load rating Charge statique	Fatigue life Durée de vie	Speed Vitesse
G	l	W	Accuracy Précision						
19 (1.25)	10	-	11 9 6.5	100	0.001	3500	3000	485	11000



Rodillo de apoyo KRVE19-PP

Caractéristique	Valeur
Roscado	M8X125
Longitud (mm)	32
D - Diámetro exterior (mm)	19
Marca	Genérica alta calidad
Tipo del rodamiento	Rodillo de apoyo de leva de agujas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Especificaciones	Sin excéntrico
Rodamiento serie	KRVE
Tipo de jaula exterior	Jaula exterior abombada
Unidad de venta	pieza

