


Rodillo de apoyo CFE10-1-B-R-IKO

CFE10-1-B-R-IKO

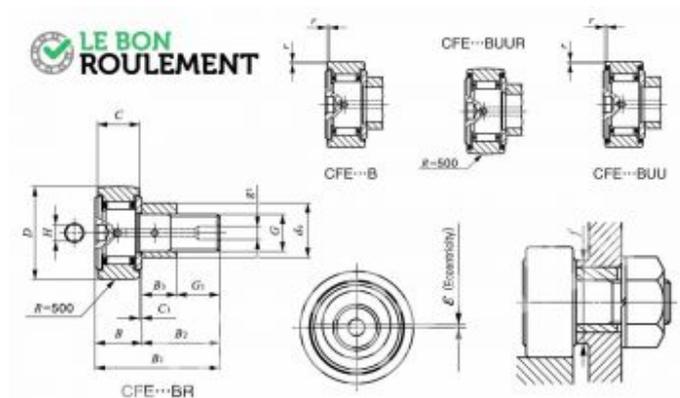

Outer diameter roller mm	Identification number				Mass (Ref.)			
	Shield type		Sealed type		g	D	C	d _o
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
13	CFE 10-1 BR	CFE 10-1 B	CFE 10-1 BUUR	CFE 10-1 BUU	65	26	12	13

Boundary dimensions mm											Mounting dimension f Min, mm	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N
G	B ₁	B _{max}	B _{1max}	B ₂	C ₁	g ₁	G ₁	H	r _{max}	r					
M10 × 1.25	10.5	13.2	36.2	23	0.6	—	12.5	4	0.3	0.4	16	13.8	5 430	6 890	6 890



Rodillo de apoyo CFE10-1-B-R-IKO

Caractéristique	Valeur
Roscado	M10X125
Longitud (mm)	36,2
D - Diámetro exterior (mm)	26
Marca	IKO
Tipo del rodamiento	Rodillo de apoyo de leva de agujas
Tipo de sellado	No estanco
Especificaciones	Con excéntrico
Rodamiento serie	CFE
Tipo de jaula exterior	Jaula exterior abombada
Unidad de venta	pieza

