


Rodillo de apoyo CFE20-B-UU-IKO

CFE20-B-UU-IKO

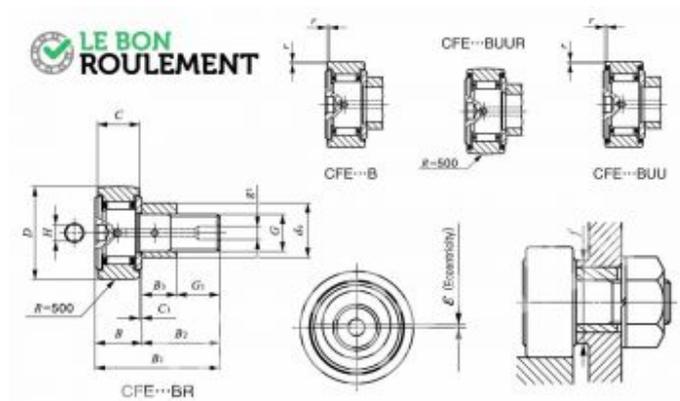

Outer diameter roller mm	Identification number				Mass (Ref.)			
	Shield type		Sealed type		g	D	C	d ₀
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
27	CFE 20 BR	CFE 20 B	CFE 20 BUUR	CFE 20 BUU	500	52	24	27

Boundary dimensions mm										Eccentricity e	Mounting dimension f Min. mm	Maximum tightening torque N-m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N
G	B ₁	B _{max}	B _{1max}	B ₂	C ₁	g ₁	G ₁	H	r _{max}						
M20 × 1.5	19.5	25.6	66.1	40.5	0.8	8	21	8	1	0.8	34	119	20 700	34 600	34 600



Rodillo de apoyo CFE20-B-UU-IKO

Caractéristique	Valeur
Roscado	M20X150
Longitud (mm)	66,1
D - Diámetro exterior (mm)	52
Marca	IKO
Tipo del rodamiento	Rodillo de apoyo de leva de agujas
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Especificaciones	Con excéntrico
Rodamiento serie	CFE
Tipo de jaula exterior	Jaula exterior plana
Unidad de venta	pieza

