


# Rodillo de apoyo CFE6-IKO

## CFE6-IKO

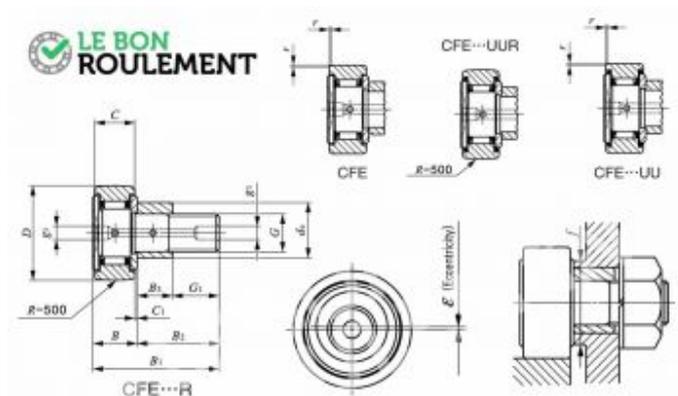

Date Series of accessories mm	Identification number				Mass (Ref.) g	D	C	d <sub>c</sub>
	Shield type		Sealed type					
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
9	CFE 6 R	CFE 6	CFE 6 UUR	CFE 6 UU	20,5	16	11	9

Boundary dimensions mm										Mounting dimension f Min. mm	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Maximum allowable static load N
G	B <sub>1</sub>	B <sub>max</sub>	B <sub>1max</sub>	B <sub>2</sub>	C <sub>1</sub>	g <sub>1</sub>	G <sub>1</sub>	r <sub>max</sub>	Eccentricity ε					
M 6×1	7,5	12,2	28,2	16	0,6	4	8,5	0,3	0,4	11	2,7	3 860	3 650	1 950



**Rodillo de apoyo CFE6-IKO**

<b>Caractéristique</b>	<b>Valeur</b>
Roscado	M6X100
Longitud (mm)	28,2
D - Diámetro exterior (mm)	16
Marca	IKO
Tipo del rodamiento	Rodillo de apoyo de leva de agujas
Tipo de sellado	No estanco
Especificaciones	Con excéntrico
Rodamiento serie	CFE
Tipo de jaula exterior	Jaula exterior plana
Unidad de venta	pieza

