


Rodillo de apoyo CFE20-V-R-IKO

CFE20-V-R-IKO

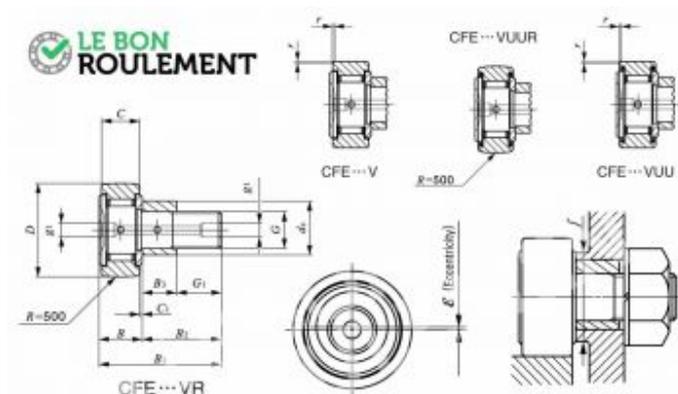

Outside diameter of roller (mm)	Identification number				Mass (Ref.) g	D	C	d _c
	Shield type		Sealed type					
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
27	CFE 20 VR	CFE 20 V	CFE 20 VUUR	CFE 20 VUU	505	52	24	27

Boundary dimensions mm										Mounting dimension f Min. mm	Maximum tightening torque N-m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N
G	B ₁	B _{max}	B ₂	C ₁	g ₁	G ₂	r ₁ max	r ₂	r ₃					
M20 × 1.5	19.5	25.6	66.1	40.5	0.8	8	21	1	0.8	34	119	33 200	64 500	37 500



Rodillo de apoyo CFE20-V-R-IKO

Caractéristique	Valeur
Roscado	M20X150
Longitud (mm)	66,1
D - Diámetro exterior (mm)	52
Marca	IKO
Tipo del rodamiento	Rodillo de apoyo de leva de agujas
Tipo de sellado	No estanco
Especificaciones	Con excéntrico
Rodamiento serie	CFE
Tipo de jaula exterior	Jaula exterior abombada
Unidad de venta	pieza

