


Rodillo de apoyo CFE30-1-V-R-IKO

CFE30-1-V-R-IKO

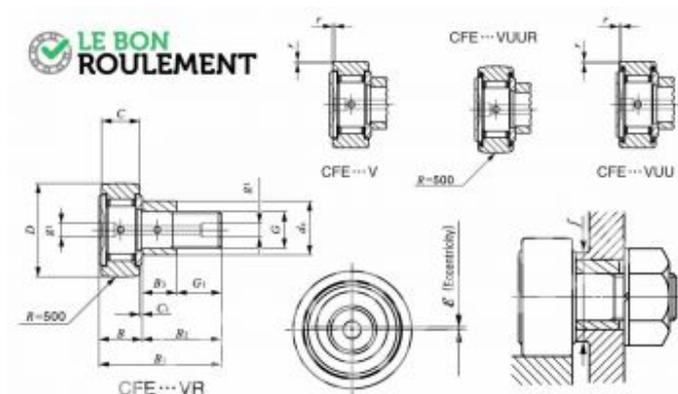

Outside diameter of roller mm	Identification number				Mass (Ref.) g	D	C	d _c
	Shield type		Sealed type					
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
41	CFE 30-1 VR	CFE 30-1 V	CFE 30-1 VUUR	CFE 30-1 VUU	2 190	85	35	41

Boundary dimensions mm										Mounting dimension f Min. mm	Maximum tightening torque N-m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N
G	B ₁	B _{max}	B ₂	B ₃	C ₁	G ₁	G ₂	r ₁ max	r ₂ max					
M30 × 1.5	32.5	37	100	63	1	8	30.5	1	1.5	49	438	67 700	144 000	85 900



Rodillo de apoyo CFE30-1-V-R-IKO

Caractéristique	Valeur
Roscado	M30X150
Longitud (mm)	100
D - Diámetro exterior (mm)	85
Marca	IKO
Tipo del rodamiento	Rodillo de apoyo de leva de agujas
Tipo de sellado	No estanco
Especificaciones	Con excéntrico
Rodamiento serie	CFE
Tipo de jaula exterior	Jaula exterior abombada
Unidad de venta	pieza

