


# Rodillo de apoyo PWKRE90-2RS-SKF

## PWKRE90-2RS-SKF

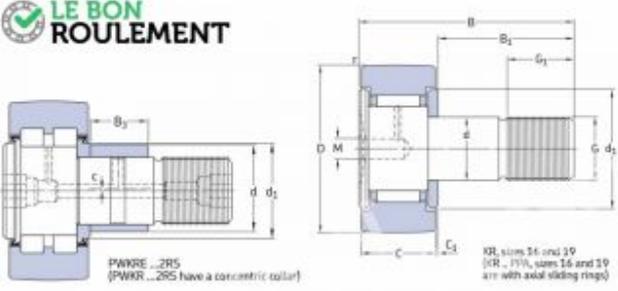

**LE BON ROULEMENT**

PWKRE...2RS (PWR...2RS have a concentric collar)

RL sizes 16 and 19 (RL...17), sizes 16 and 19 are with axial sliding rings

Dimensions														Mass	Designation		
D	C	d	B	B <sub>1</sub>	B <sub>2</sub>	C <sub>1</sub>	d <sub>1</sub>	G	G <sub>1</sub>	M	M <sub>2</sub>	r	SW	c	B <sub>3</sub>	kg	—
mm																	
90	35	15	100	63	15	1	47	M30x1.5	32	8	4	3.5	14	1.5	29	2.02	<b>PWKRE 90.2RS</b>

Designation	Basic load ratings		Fatigue load limit	Maximum radial loads		Limiting speed
	dynamic	static		dynamic	static	
—	C	C <sub>0</sub>	P <sub>0</sub>	F <sub>r</sub>	F <sub>0r</sub>	r/min
<b>PWKRE 90.2RS</b>	62,7	85	10,8	106	153	2000



**Rodillo de apoyo PWKRE90-2RS-SKF**

<b>Caractéristique</b>	<b>Valeur</b>
Roscado	M30X150
Longitud (mm)	100
D - Diámetro exterior (mm)	90
Marca	SKF
Tipo del rodamiento	Rodillo de apoyo de leva de rodillos
Tipo de sellado	Doble estanco plástico (2RS, 2RS1, DDU, LLU, EE)
Especificaciones	Con excéntrico
Rodamiento serie	PWKRE
Tipo de jaula exterior	Jaula exterior abombada
Unidad de venta	pieza

