


Rodamiento de agujas RNAFW284032-IKO

RNAFW284032-IKO

LE BON ROULEMENT

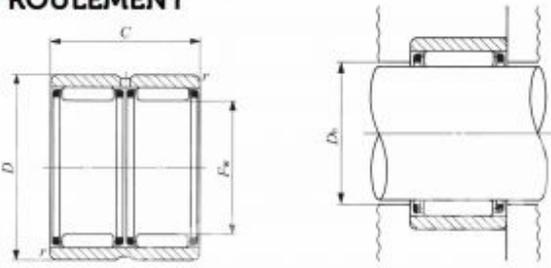

Shul. dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm				Standard mounting dimensions mm			Basic dynamic load rating C N	Basic static load rating C0 N
			F _w	D	C	r _{s min} (%)	d _s	D _s Max.	D _s Min.		
28	RNAF 284016	62.5	28	40	16	0.3	33.4	38	28.6	20 100	26 500
	RNAFW 284032	125	28	40	32	0.3	33.4	38	28.6	34 400	53 000

Admissible rotational speed (2)

rpm

18 000
18 000



Rodamiento de agujas RNAFW284032-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	28
D - Diámetro exterior (mm)	40
C - Espesor (mm)	32
Marca	IKO
Tipo del rodamiento	De agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Especificaciones	Jaula doble
Rodamiento serie	RNAF
Unidad de venta	pieza

