


Rodamiento de agujas RNAF354716-IKO

RNAF354716-IKO

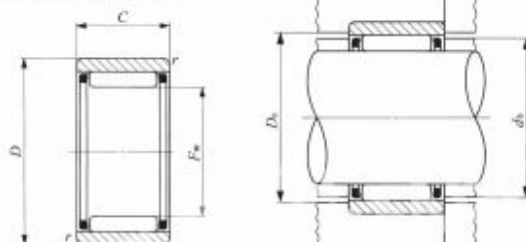

Shut dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm				Standard mounting dimensions mm			Basic load rating C _N	Basic static load rating C ₀
			F _w	D	C	r _s min	d _s	D _s Max.	D _h		
25	RNAF 354517	67.5	35	45	17	0.3	39.5	43	35.6	20 500	38 900
	RNAF/W 354526	103	35	45	26	0.3	39.5	43	35.6	26 600	51 500
	RNAF 354716	75.5	35	47	16	0.3	40.4	45	35.6	23 100	33 900
	RNAF/W 354732	151	35	47	32	0.3	40.4	45	35.6	39 500	67 800

Admissible rotational speed (°)
rpm
14 000
14 000
14 000
14 000



Rodamiento de agujas RNAF354716-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	35
D - Diámetro exterior (mm)	47
C - Espesor (mm)	16
Marca	IKO
Tipo del rodamiento	De agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Rodamiento serie	RNAF
Unidad de venta	pieza

