


## Rodamiento de agujas RNAF405017-IKO

RNAF405017-IKO



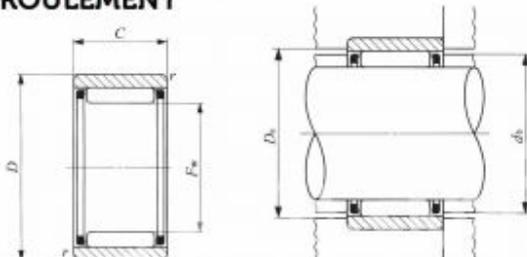

Shut dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm				Standard mounting dimensions mm			Basic bearing load rating C <sub>10</sub> N	Basic static load rating C <sub>11</sub> N
			F <sub>w</sub>	D	C	r <sub>s min</sub> (%)	d <sub>s</sub>	D <sub>s</sub> Max.	D <sub>b</sub>		
40	RNAF 405017	76	40	50	17	0.3	43.5	48	40.8	22 200	42 700
	RNAFW 405034	152	40	50	34	0.3	43.5	48	40.8	38 000	85 400
	RNAF 405520	140	40	55	20	0.3	45.2	53	40.8	31 400	48 000
	RNAFW 405540	280	40	55	40	0.3	45.2	53	40.8	53 900	96 000

Allowable rotational speed (2)

rpm

12 000  
12 000  
12 000  
12 000



**Rodamiento de agujas RNAF405017-IKO**

<b>Caractéristique</b>	<b>Valeur</b>
d - Diámetro interior (mm)	40
D - Diámetro exterior (mm)	50
C - Espesor (mm)	17
Marca	IKO
Tipo del rodamiento	De agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Rodamiento serie	RNAF
Unidad de venta	pieza

