


Rodamiento de agujas RNAFW405034-IKO

RNAFW405034-IKO



LE BON
ROULEMENT

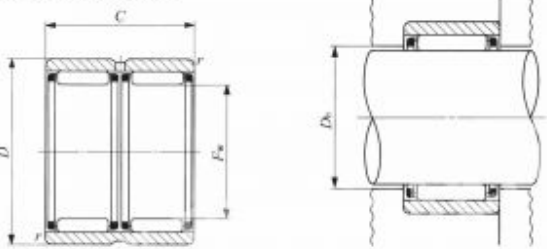

Shut dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm					Standard mounting dimensions mm			Basic dynamic load rating C N	Basic static load rating C0 N
			F ₂	D	C	r _a (1)	d _b	D _s Max.	D _b			
40	RNAF 405017	76	40	50	17	0.3	43.5	48	40.8	22 200	42 700	
	RNAFW 405034	152	40	50	34	0.3	43.5	48	40.8	38 000	85 400	
	RNAF 405520	140	40	55	20	0.3	45.2	53	40.8	31 400	48 000	
	RNAFW 405540	280	40	55	40	0.3	45.2	53	40.8	63 900	96 000	

Allowable rotational speed (2)

rpm

12 000

12 000

12 000

12 000



Rodamiento de agujas RNAFW405034-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	40
D - Diámetro exterior (mm)	50
C - Espesor (mm)	34
Marca	IKO
Tipo del rodamiento	De agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Especificaciones	Jaula doble
Rodamiento serie	RNAF
Unidad de venta	pieza

