


Rodamiento de agujas RNAF506220-IKO

RNAF506220-IKO

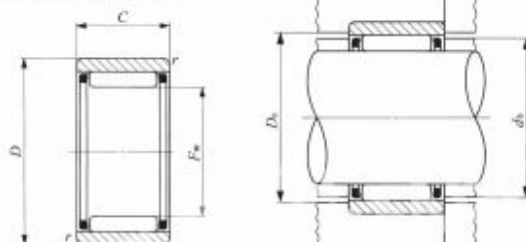

Shut dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm				Standard mounting dimensions mm			Basic load rating C_0 N	Basic static load rating C_{0s} N
			F_w	D	C	$r_{s\ min}$ (%)	d_b	D_s Max.	D_b		
50	RNAF 506220	138	50	62	20	0.3	54.2	60	50.8	27 100	59 300
	RNAFW 506240	275	50	62	40	0.3	54.2	60	50.8	46 400	119 000
	RNAF 506520	170	50	65	20	0.3	55.2	63	50.8	35 900	61 100
	RNAFW 506540	340	50	65	40	0.8	55.2	61	50.8	61 500	122 000

Allowable rotational speed (°)
rpm
10 000
10 000
10 000
10 000



Rodamiento de agujas RNAF506220-IKO

Caractéristique	Valeur
d - Diámetro interior (mm)	50
D - Diámetro exterior (mm)	62
C - Espesor (mm)	20
Marca	IKO
Tipo del rodamiento	De agujas
Tipo de sellado	No estanco
Tipo de jaula	Acero
Rodamiento serie	RNAF
Unidad de venta	pieza

