


Rodamiento de agujas RNAFW709060-IKO

RNAFW709060-IKO



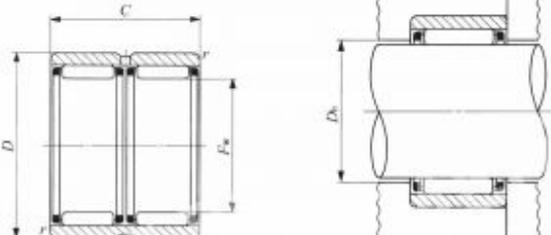

| Shut dia. mm | Identification number | Mass (Ref.) g | Boundary dimensions mm | | | | Standard mounting dimensions mm | | | Basic dynamic load rating C | Basic static load rating C ₀ |
|-----------------|-----------------------|---------------------|------------------------|----|----|--------------------|---------------------------------|------------------------|----------------|--------------------------------|--|
| | | | F _w | D | C | r _a min | d _b | D _s Max. | D _b | | |
| 70 | RNMF 709030 | 500 | 70 | 80 | 30 | 1.5 | 77 | 82 | 71 | 61 200 | 136 000 |
| | RNAFW 709060 | 1 000 | 70 | 80 | 60 | 1.5 | 77 | 82 | 71 | 105 600 | 272 000 |

| Allowable rotational speed ¹⁾ |
|--|
| rpm |
| 7 000 |
| 7 000 |



Rodamiento de agujas RNAFW709060-IKO

| Caractéristique | Valeur |
|----------------------------|---------------|
| d - Diámetro interior (mm) | 70 |
| D - Diámetro exterior (mm) | 90 |
| C - Espesor (mm) | 60 |
| Marca | IKO |
| Tipo del rodamiento | De agujas |
| Tipo de sellado | No estanco |
| Tipo de jaula | Acero |
| Especificaciones | Jaula doble |
| Rodamiento serie | RNAF |
| Unidad de venta | pieza |

